Green Egersund
Hull No. 109

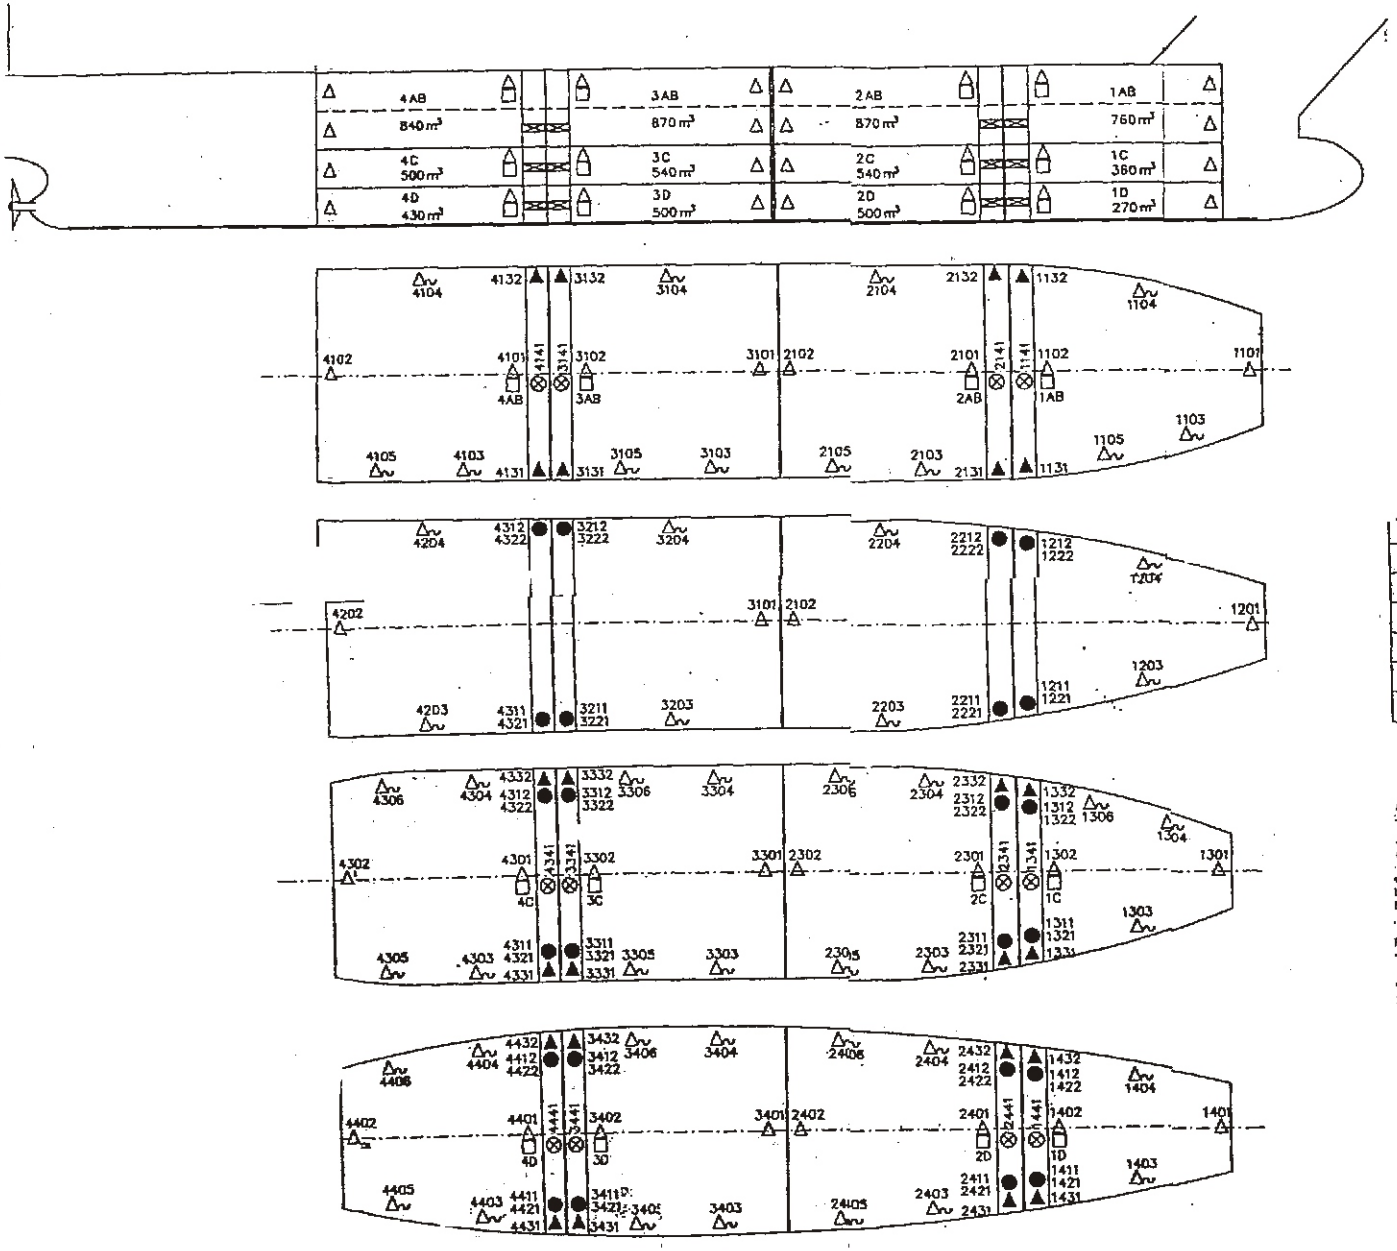

SYMB.	NO. OF	DESCRIPTION
△	49	USDA FRUIT SENSOR, PORTABLE DATA LOGGER
△	28	USDA AIR SENSOR, FIXED – DATA LOGGER
▲	24	RETURN AIR SENSOR
⊗	12	HUMIDITY SENSOR
●	24	CONTROL SENSOR – DELIVERY SENSOR
□	12	CO_2 MEASURING INPUT

AIR SENSORS (fixed)

- Shall be located on the center line of the vessel approximately 30 centimeters from the ceiling.
- Shall be attached in such a way that they do not touch the bulkhead and are protected from damage from the cargo. See drawing F-22731

FRUIT SENSORS (Portable)

- Shall be stowed in recessed compartments to protect from damage when not in use. See drawing F-22731