Tundra King
Hull No. 278

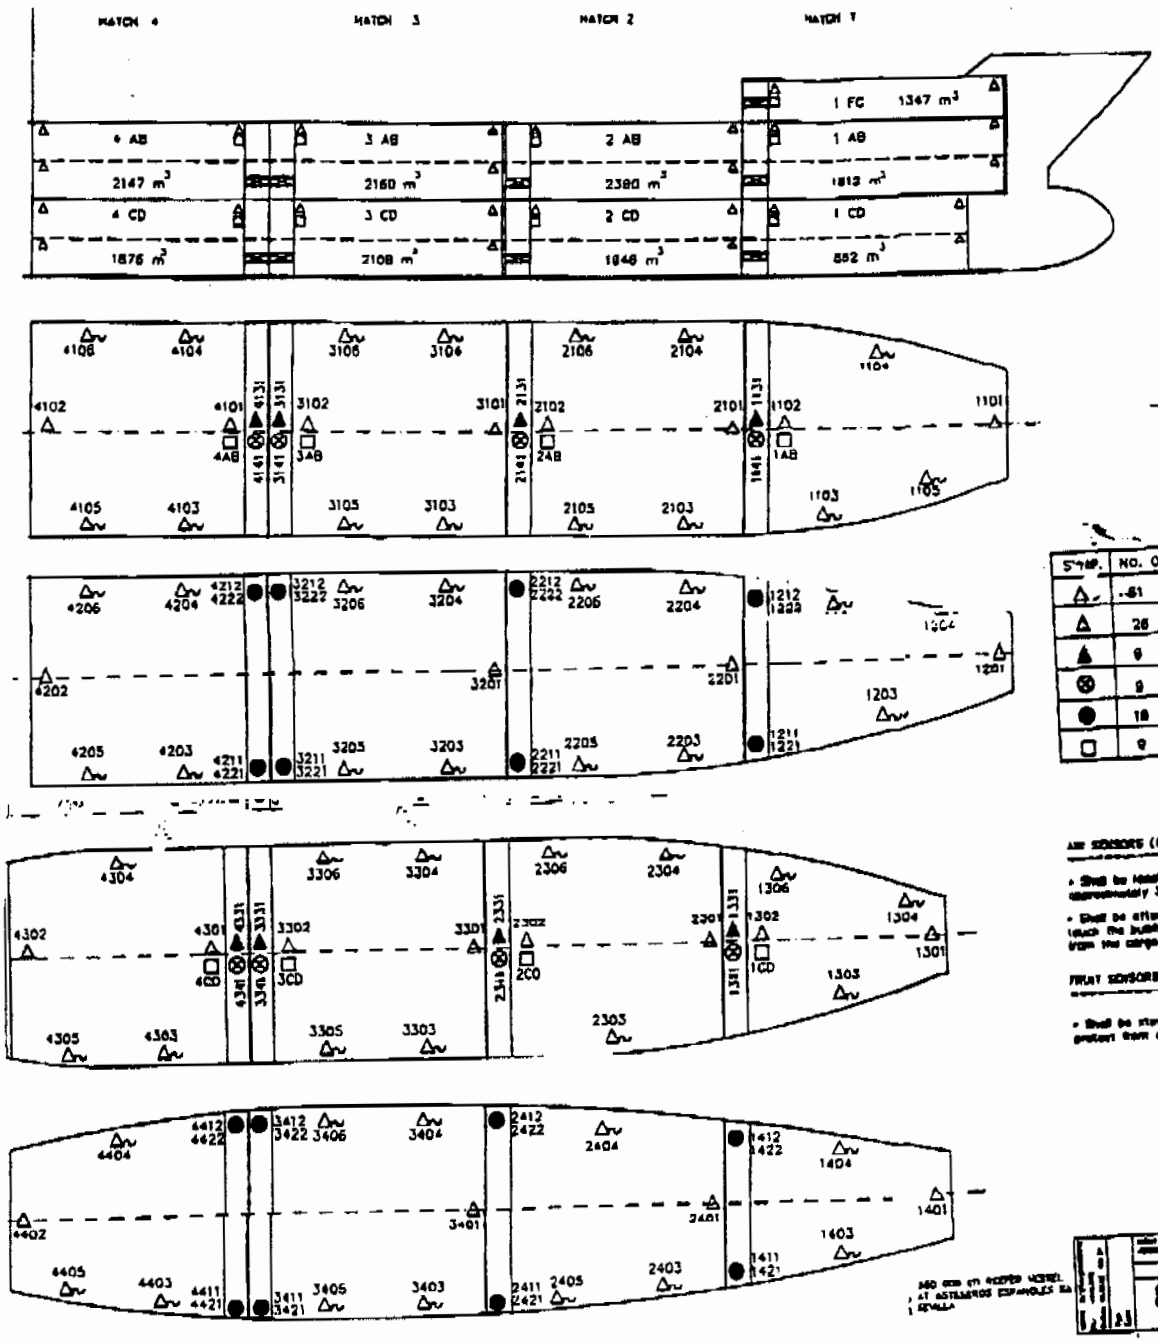



SYMB.	NO. OF	DESCRIPTION
△	61	USDA FRUIT SENSOR, PORTABLE – DATA LOGGER
△	26	USDA AIR SENSOR, FIXED – DATA LOGGER
▲	9	RETURN AIR SENSOR
⊗	9	HUMIDITY SENSOR
●	18	CONTROL SENSOR – DELIVERY SENSOR
□	9	CO_2 MEASURING INPUT

AIR SENSORS (fixed)

- Shall be located on the center line of the vessel approximately 30 centimeters from the casing.
- Shall be attached in such a way that they do not touch the bulkhead and are protected from damage from the cargo. See drawing F-22731

FRUIT SENSORS (Portable)

- Shall be stowed in reinforced compartments to protect from damage when not in use. See drawing F-22731

APPROVED

STAL

LOCATION OF TEMP HUMIDITY AND CO_2 SENSORS

9660.0018-